



**Triple glazing bead**  
*for optimum energy efficiency*

**Triple glazing bead** enables you to produce **energy efficient windows** with a U-value of 0.8\*




Suitable for Shield 6 system

# Triple glazing bead

## for optimum energy efficiency

- Capable of achieving a U-value of 0.8\* or less
- Improved acoustic performance
- Available in white, 3 Woodgrains and 13 Artisan colours

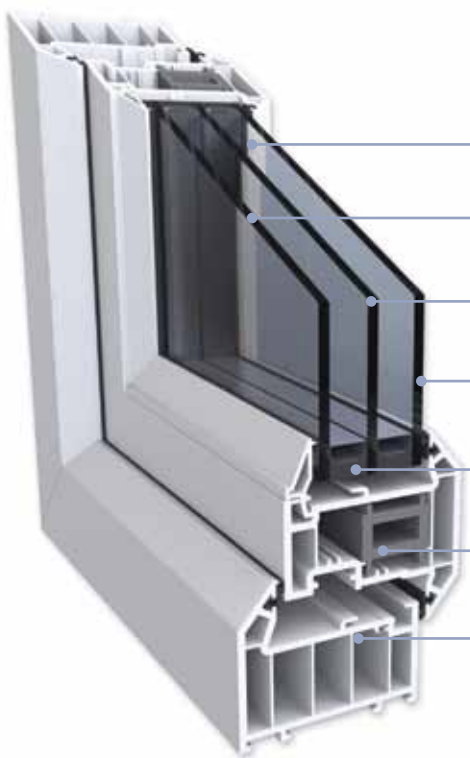

Argon Gas

Internal Pane: Low E Glass

Second Pane: Low E Glass

External Pane: Clear Float Glass

Warm Edge Spacer Bars

Thermal Reinforcing

5 Chamber Profile

**Combination achieves:  
1.0 U-value/+15A**

Argon Gas

Internal Pane: Planitherm Total+

Second Pane: Planitherm Total+  
Toughened Glass

External Pane: Clear Float Glass

Warm Edge Spacer Bars

Thermal Reinforcing

5 Chamber Profile

**Combination achieves:  
0.9 U-value**

Argon Gas

Internal Pane: Planitherm ONE

Second Pane: Planitherm ONE  
Toughened Glass

External Pane: Clear Float Glass


Warm Edge Spacer Bars

Thermal Reinforcing

5 Chamber Profile

**Combination achieves:  
0.8\* U-value**

Code	Description	Length	Pack Size
TCJB	Shield Triple Glazing Bead	6m	20

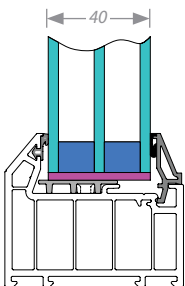

TCJB Shield

### Glazing Packers

Code	Description	Pack Size
SH6140	2mm Black 40mm Glazing Packer	1000
SH6240	3mm White 40mm Glazing Packer	1000
SH6340	4mm Grey 40mm Glazing Packer	1000
SH6440	5mm Blue 40mm Glazing Packer	1000